

**✓ SHERWOOD SCUBA**  
**MAXIMUS**  
**REGULATOR**  
**OWNER'S MANUAL**



**COPYRIGHT SHERWOOD SCUBA**  
**V1.11.2024**  
**SherwoodScuba.com**

# SHERWOOD SCUBA



# MAXIMUS

## REGULATOR SET

Upgraded in 2023 with the SR2 1st Stage, the Maximus Pro with the SR2 Valve Body Design is the pinnacle of performance and comfort. The SR2 1st Stage regulator is the only Flow Through Piston regulator that is both environmentally sealed and internally dry and still offers a depth compensation mechanism. Sherwood's **Three Pin Link (3PL)** transfers the environmental pressure to the piston and provides consistent flow at any depth.

## MAXIMUS PRO 2ND STAGE

- **Seat Saving Floating Crown (SSFC)** - Extends seat life while not in use.
- One touch performance adjustment.
- Under arm hose swivel with extended 42" hose.
- Free parts for life (Restrictions apply).


## PART NUMBERS

**SRB9800** (Maximus Pro)

Average WOB less than 0.75 J/L  
RMV = 62.5 l/min.  
Depth = 50 m  
Service pressure = 50 bar

\*WOB = Work Of Breathing

\*RMV = Respiratory Minute Value

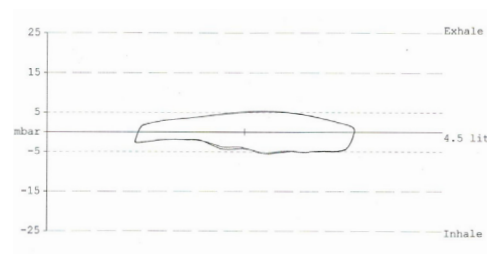

*This regulator is suitable for water temperatures warmer than 39°F (4°C).*

# TABLE OF CONTENTS

<b>1.0 INTRODUCTION</b>	<b>5</b>
1.1 WARNINGS & CAUTIONS (DEFINITIONS)	5
1.2 TRAINING REQUIREMENTS	5
1.3 SERVICE REQUIREMENTS	5
1.4 NITROX USE	5
1.5 COLD WATER USE	5
<b>2.0 ENRICHED AIR NITROX (EAN)</b>	<b>6</b>
<b>3.0 INITIAL SET UP</b>	<b>6</b>
<b>4.0 BEFORE &amp; DURING THE DIVE</b>	<b>7</b>
4.1 BEFORE THE DIVE	7
4.2 DIVING WITH THE REGULATOR	7
4.2 ADJUSTMENT DURING THE DIVE	8
<b>5.0 AFTER DIVE, STORAGE &amp; SERVICE</b>	<b>9</b>
5.1 AFTER THE DIVE	9
5.2 STORAGE	9
5.3 DEALER SERVICE	9
<b>6.0 LIMITED LIFETIME WARRANTY</b>	<b>10</b>
<b>7.0 REGISTRATION, RESTRICTIONS &amp; RETURNING</b>	<b>10</b>
7.1 PRODUCT REGISTRATION	10
7.2 RESTRICTIONS	10
7.3 RETURNING YOUR REGULATOR FOR SERVICE	10
<b>8.0 CE INFORMATION</b>	<b>11</b>

# 1.0 INTRODUCTION

Thank you for choosing the Sherwood Maximus Pro Regulator!

To get the most satisfying use of this product, please take time to read this entire manual to understand the use and limitations of the Sherwood Blizzard Pro Regulator before you attempt to use it. If you have any questions contact your Authorized Sherwood Scuba Dealer for immediate attention or you may contact us at [Sherwood Scuba](#).

## 1.1 WARNINGS & CAUTION (DEFINITIONS)

This User's Manual contains signal words that are intended to designate levels of hazardous conditions. These signal words and their designations are as follows:



**WARNING** indicates a potentially hazardous condition or situation which, if not avoided, could result in death or serious injury.



**CAUTION** indicates a potentially hazardous condition or situation which, if not avoided, may result in minor or moderate injury. It may also be used to alert against practices that may harm or cause permanent damage to equipment.

## 1.2 TRAINING REQUIREMENTS



**WARNING** : Sherwood Scuba equipment is intended for use only by persons trained and certified by a nationally recognized scuba training agency.

Diving without the specific training including safe diving practices and within the limits defined by the training agency exposes the user to extremely hazardous situations that could result in serious personal injury or death. This manual is not a substitute for the instruction needed to dive in a safe manner.

## 1.3 SERVICE REQUIREMENTS



**WARNING** : Sherwood regulators must not be serviced by anyone untrained. To perform the correct service or repair procedures, return your equipment to an Authorized Sherwood Dealer.

Any time the equipment appears to be performing incorrectly or when recommended service is needed, return your equipment to an Authorized Sherwood Dealer. Do not attempt to disassemble or modify the equipment. Equipment that is not properly serviced could lead to a malfunction during use with possible serious personal injury or death.

## 1.4 NITROX USE



**WARNING** : Requires specialized training to avoid hazards that could lead to serious personal injury or death. Be certain to read the information in this manual concerning Nitrox use.

## 1.5 COLD WATER USE



**WARNING** : Diving in water temperatures less than 50°F (10°C) can impose operational limits affecting the reliable operation of the equipment.

Be certain to read the information concerning cold water diving before attempting to use the equipment under such conditions.

## 2.0 ENRICHED AIR NITROX (EAN)



**WARNING** : Use of Enriched Air Nitrox (EAN) exposes the user to additional risks that are not present when diving with standard air.

Breathing EAN under pressure requires a full understanding of these risks and requires specific instruction beyond that taught in basic scuba training.

Additionally, equipment exposed to EAN must be configured and maintained properly to avoid the risk of fire associated with use of oxygen enriched gases.

Failure to understand and avoid these risks may lead to serious personal injury or death.

Sherwood regulators have been designed and manufactured for use with clean air or Nitrox mixtures containing no more than 40% oxygen.

Preparation for use with oxygen enriched gas mixtures requires the proper selection of compatible materials and clean manufacturing practices that minimize the presence of combustible materials inside the regulator. Your Sherwood regulator has been manufactured observing these requirements.

In order to maintain the necessary level of cleanliness Sherwood recommends that the regulator be dedicated to Nitrox use only.

However, if you wish to use the regulator with Nitrox and air interchangeably, you must exercise care to pass only clean air through the regulator. The level of cleanliness must be such that it contains condensed hydrocarbons of not more than 0.1 mg/ liter. If you are uncertain as to whether the air you expect to use meets this cleanliness requirement it is recommended that you avoid air use or have the regulator cleaned for EAN service before exposure to EAN.

---

## 3.0 INITIAL SET UP

Your Sherwood regulator provides options for the attachment of accessories such as the submersible pressure gauge or dive computer, the buoyancy compensator inflator air supply and the alternate air source (octo).

Sherwood recommends that you consult your Authorized Sherwood Dealer to install these accessories for you.

# 4.0 BEFORE & DURING THE DIVE

## 4.1 BEFORE THE DIVE

It is important to inspect the regulator before starting your dive trip and again just before you enter the water. The pre-dive check should consist of at least the following steps.

1. Carefully inspect all hoses for signs of damage. This may require you to retract the hose protectors at the ends of the hoses to examine the hose condition near the end fittings. If the hose is damaged have your Authorized Sherwood Dealer replace it before you dive.
2. Visually inspect the entire regulator for signs of damage. If in doubt ask your Authorized Sherwood Dealer to assist you in performing this examination.
3. Connect the regulator to a pressurized cylinder and press the purge button several times to confirm air flow. Take a few test breaths. The effort to breathe should be minimal. If there is an unusual breathing resistance, have your regulator checked by a professional instructor or by your Authorized Sherwood Dealer before attempting to enter the water.
4. Once pressurized do not attempt to reposition the regulator to achieve a different hose orientation. Further, do not attempt to carry the assembly by the hoses or by using the installed regulator as a handle for lifting the cylinder. This may damage components and compromise your dive.
5. Sherwood regulators (except BRUT SRB9150) provide the user with a device to control the venturi assist that is intended to decrease inhalation resistance at high flow rates. The maximum assist or least resistance is present when the switch is rotated clockwise toward the mouthpiece of the second stage. The venturi assist is reduced (breathing resistance is increased) when the switch is rotated counterclockwise toward the front of the second stage. When the venturi assist is reduced the regulator will be more stable when the second stage is unattended. When the user is breathing the switch should be in the least resistance position.

## 4.2 DIVING WITH THE REGULATOR



**WARNING** : You must be aware of and observe special measures for diving in cold water at temperatures below 50°F (10°C) in order to minimize the risk of regulator freezing.

Training must include emergency measures for dealing with regulator free flow. Failure to obtain the necessary training and mastery of the skills needed before diving in cold water could lead to hazardous conditions with possibility of serious personal injury or death.

Your Sherwood regulator has been designed to provide an ample air supply with minimal resistance. This should provide you with many hours of comfortable diving. However, if you feel the breathing for any reason is labored or distressing do not continue to dive. Have the regulator evaluated by your Authorized Sherwood Dealer before continuing to dive with it. The initial opening effort required to start air flow with inhalation is intentionally set low to provide you with effortless breathing. You may also unintentionally start air flow if you impact the second stage upon entry or suddenly remove the regulator from your mouth during inhalation. Sometimes this will cause the regulator to continue to flow. If this occurs, simply cover the mouthpiece opening with your thumb or replace the regulator in your mouth. The flow should stop. If it does not, then you must terminate the dive and have the regulator examined.

## 4.0 BEFORE & DURING THE DIVE

### 4.3 ADJUSTMENT DURING THE DIVE

The Maximus has only one user adjustment. Adjusting the second stage knob affects both the initial breathing effort and the venturi assisting effect. The operation of the knob is the same as most regulators of this type. The easiest way to remember the operation is to think of a water faucet. You turn the faucet counterclockwise to increase the flow and clockwise to reduce it.

Note that when the knob is turned inwards all the way, reducing flow and Venturi effect; we call that “Full In” and when it is turned outwards all the way, increasing flow and Venturi effect, is called “Full Out”.

#### IN : Reduced Flow



When diving at the surface or when the regulator is out of the water, it is important to adjust the regulator sensitivity to the least sensitive position (turned to “Full In” ) to stop the venturi assisting effect and minimize the possibility of uncontrolled free flow of air.

While diving, it is recommended that the regulator be operated at high sensitivity (gradually turned out) but without causing the regulator to free flow. Breathing with greater resistance will not conserve air and, in fact, may result in more work and increased air consumption.

#### OUT : Maximum Flow





# 5.0 AFTER DIVE, STORAGE & SERVICE

## 5.1 AFTER THE DIVE

The best time to clean your regulator is as soon as possible after concluding diving activity for the day. Delayed rinsing of the equipment increases the opportunity for corrosion or deposits to form which eventually may degrade performance of the regulator.

If possible, you should rinse the regulator while it is still pressurized. This minimizes opportunities for contaminants to reach interior passages of the regulator.

If you are not able to leave the unit pressurized for rinsing, then be certain to replace the first stage inlet protector (Dust Cap) before rinsing. During the rinsing process do not depress the second stage purge as this will open the demand valve and provide an opportunity for contaminants to enter the valve sealing area. Dry the regulator before long term storage.

## 5.2 STORAGE

Once the regulator is dry, store the regulator in a container that will minimize exposure to dirt, chemicals, or ultraviolet light. Storage near electrical equipment such as motors, computers and other appliances exposes the regulator to ozone which can prematurely deteriorate certain seals and rubber parts.

## 5.3 DEALER SERVICE

It is strongly recommended that the regulator be inspected by an Authorized Sherwood Dealer at minimum annually or anytime you suspect that performance has decreased or damage may be present. This could reveal an issue that can be resolved before reaching a dive destination.

It is also recommended that your regulator receive a factory recommended service overhaul every other year or after 300 hours of use, whichever comes first. Your regulator may need service sooner depending on the severity of the environmental conditions or level of user care and cleaning.

With each service your Authorized Sherwood Dealer is required to register the service at [www.SherwoodScuba.com](http://www.SherwoodScuba.com). Ask your dealer to print a copy of the service registration to keep as a record of your service.

If the regulator is used for rental or training purposes, it will require complete overhaul and factory prescribed service every three to six months. Chlorinated swimming pool water is an especially damaging environment for SCUBA equipment, due to the high levels of chlorine and pH balancing chemicals that cause certain components to rapidly deteriorate.

## 6.0 LIMITED LIFETIME WARRANTY

In order to use this warranty, you must provide proof of purchase from an Authorized Sherwood Dealer. Save your receipts as proof of purchase. If you are unsure as to whether a dealer is authorized, contact us at [www.SherwoodScuba.com](http://www.SherwoodScuba.com) for verification.

Sherwood Scuba warrants that the Sherwood regulator purchased from Authorized Sherwood Scuba Dealers shall be free of defects in workmanship and materials for the lifetime of the regulator to the original purchaser.

Under this warranty Sherwood will either repair or replace, at its sole option, any original parts that fail to perform as intended. This warranty excludes products subject to abuse, neglect, alterations or improper unauthorized service. Warranty also excludes parts subject to wear such as hoses, mouthpieces, seals and metal parts with mild corrosion from exposure to seawater.

Under this warranty plan Sherwood will replace warranted parts but the labor to replace parts is excluded and the responsibility of the owner. To maintain your Parts Warranty please have your Authorized Dealer register each Inspection and Service at [www.SherwoodScuba.com](http://www.SherwoodScuba.com).

---

## 7.0 REGISTRATION, RESTRICTIONS & RETURNING

### 7.1 PRODUCT REGISTRATION

Please register your regulator at [www.SherwoodScuba.com](http://www.SherwoodScuba.com).

### 7.2 RESTRICTIONS

1. This warranty does not cover normal wear. Factory prescribed service by an Authorized Sherwood Dealer is required at minimum annually.
2. This warranty does not extend to damages caused by improper use, improper maintenance, neglect, unauthorized repairs, modifications, accidents, fire or casualty.
3. Cosmetic damage, such as scratches, dents, and nicks are not covered by this warranty.
4. This warranty does not extend to equipment used for rental, commercial, or military purposes.
5. This warranty covers products purchased in the United States and Canada. For warranties that may apply elsewhere, please contact your local representative.
6. Failure to meet any of the above requirements will render the warranty null and void.

### 7.3 RETURNING YOUR REGULATOR FOR SERVICE

Whenever your regulator requires annual service or warranty repair, Sherwood requires that you bring it or send it to your nearest Authorized Sherwood Dealer.

If you need to return products covered by this warranty, please provide your dealer with photocopies of your original sales receipt, and ask them to print a copy of the service records that are maintained at [www.SherwoodScuba.com](http://www.SherwoodScuba.com).

**COPYRIGHT SHERWOOD SCUBA**  
**V1.11.2024**  
**SherwoodScuba.com**